



LockOut™

Hard Floor Protector



LockOut is a micro-film forming surface treatment that hardens and protects the floor. It creates a breathable, ultra-hard, water and dust repellent surface. The formulation is an acrylic polymer and colloidal lithium blend that offers superior stain protection and the ability to burnish the floor to a high gloss shine.

DIRECTIONS


Read all directions and Safety Data Sheets (SDS) before using.

1. Clean floor with a neutral cleaner. Allow floor to dry thoroughly.
2. Apply thinly and evenly on the floor using a pump-up sprayer at an approximate coverage rate of 3500 sq ft per gallon (86 sq m per liter).
3. Spread evenly on the floor using a clean micro-fiber applicator or lint free flat fiber mop pre-sprayed with LockOut.
4. After the product has dried thoroughly, burnish the floor using a hair blend pad.
5. Apply a second coat, following instructions 2-4.
6. Do not allow water on the floor for at least 24 hours.

PRODUCT INFO

Product Code	423FS	423FSE
Volume	2.5 US gallons	10 liters
Shipping Package	2 x 2.5 gallons	2 x 10 liters
Pallet Quantity	48	48

SURFACES

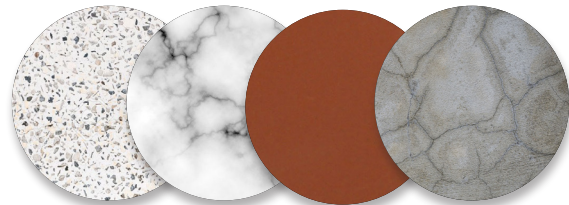

TERRAZZO (CEMENTITIOUS) MARBLE QUARRY TILE CONCRETE

TECHNICAL DATA

Description	Hard floor protector
Appearance	Milky, white liquid
pH ASTM E70-07	10.5
Flash Point	>200°F / >93°C
Viscosity (Brookfield)	<10 centipoise @ 68°F (20°C)
VOC 40 CFR Part 59 Subpart D	<100 g/L
Fragrance	No added fragrance
Density ASTM D1475-13 (2008)	8.4 lb/gal @ 68°F / 1.01 kg/l @ 20°C
Solubility	Miscible in water
Container	2.5 US gallons (FS packaging) 10 Liters (FSE packaging)

